

cable tray

item number: **NKZ 20X40**


length of cable tray: 2000 mm

thickness of metal sheet: 0,7 mm

product description: Cable tray is designed to create a cable route.

The joining of the trays is performed using the coupling NS 40 and two NSMP 5X10

Cable trays may be supplied to order with a polyester varnish (varnish layer 60, 100 µm) – contact your sales representative for more information.

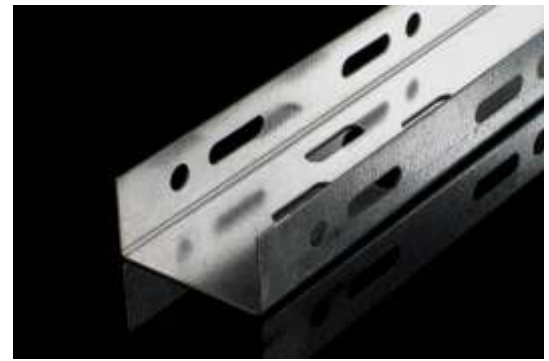


configuration: S - Pre-Galvanized, zinc-layer 15 - 27 µm
 F - Hot Dip Galvanized, zinc-layer 50 - 100 µm
 EO - epoxy coating for indoor environment, along the perimeter, 60 µm
 EC - epoxy coating for indoor environment, - total paint, 60 µm

sales amount: á 2 m

certification: EN 61537:02

storage: EN 60721-3-1

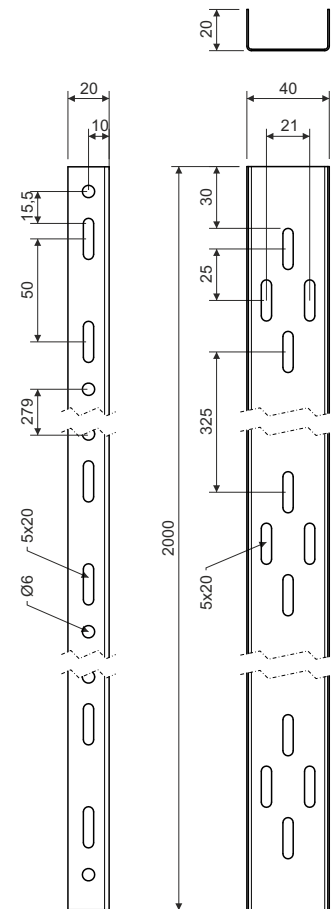

Inner usable cross-section of the channel

item number	cross-section cm ²	CYKY	CYKY	CYKY	CYKY	CYKY	CYKY	CYKY	CYKY
		3x1,5	5x1,5	3x2,5	5x2,5	3x4	5x4	5x6	5x10
		Ø8,6	Ø10,1	Ø9,5	Ø11,2	Ø11,2	Ø13,8	Ø15,1	Ø18
NKZ 40X20	8	5	4	4	3	3	2	2	1

The values state the number of cables with the tray at 50% full. Orientation diameters of the cables CYKY. The values are mathematically calculated. The limit values (small tray x big cable or contrariwise) it is necessary to consider combination of the tray and diameter of the cable and used them with reference to technical conditions.