


item number	for width of cable tray	for height of cable tray	H	thickness of metal sheet	weight kg/ps	amount of bolts for connection
NK 50X62_S	62	50	45	0,8	0,04	2
NK 50X62_F				1,0	0,05	
NK 50X125_S	125	50	45	0,8	0,06	2
NK 50X125_F				0,8	0,07	
NK 50X250_S	250	50	45	0,8	0,09	2
NK 50X250_F				0,8	0,11	
NK 100X125_S	125	100	95	0,8	0,12	4
NK 100X125_F				1,0	0,18	
NK 100X250_S	250	100	95	0,8	0,20	4
NK 100X250_F				1,0	0,29	
NK 100X500_S	500	100	95	0,8	0,44	4
NK 100X500_F				1,0	0,51	

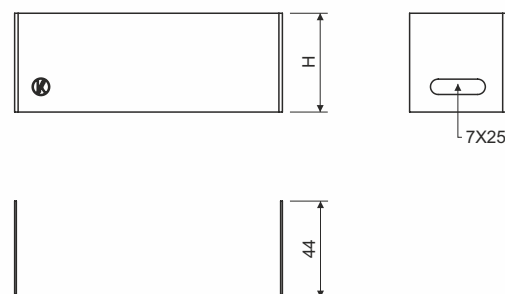

product description: The end-piece is intended to cover the end of MARS cable trays. Use the bolt NSM 6X10 for connection. The bolt head should be inside the cable tray to protect the cables inside. A bolt with a GMT surface finish is used for a tray with an F surface finish. These items can also be ordered in a varnished version.

surface finish: S - Pre-Galvanized, zinc-layer 15 - 27 µm
F - Hot Dip Galvanized, average zinc-layer 45 µm (min. 35 µm)

sales amount: á 1 pc

meets the requirements: EN 61537:02

classification: ČSN 73 0895 P 90-R
DIN 4102-12 E 90
STN 92 0205 PS 90
Fire classification is depend on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire.

storage: EN 60721-3-1

