


item number	height (H) (mm)	for height of cable tray / ladder (mm)	thickness of metal sheet (mm)	weight (kg/pc)	amount of bolts for connection (pc)	
SK 35_S	28	35	0,8	0,06	4	
SK 35_GMT			1,0	0,07		
SK 50_S	43	50	0,8	0,09	4	🔥
SK 50_GMT			1,0	0,11		🔥
SK 60_S	53	60	0,8	0,10	4	🔥🔥
SK 60_GMT			1,0	0,13		🔥🔥
SK 60_ZM			0,75	0,10		🔥🔥
SK 85_S	78	85	1,2	0,24	8	
SK 85_GMT			1,2	0,24		
SK 100_S	93	100	1,2	0,32	8	🔥
SK 100_GMT			1,2	0,32		🔥
SK 110_S	103	110	1,2	0,35	8	🔥
SK 110_GMT			1,2	0,35		🔥
SK 110_ZM			1,2	0,35		🔥

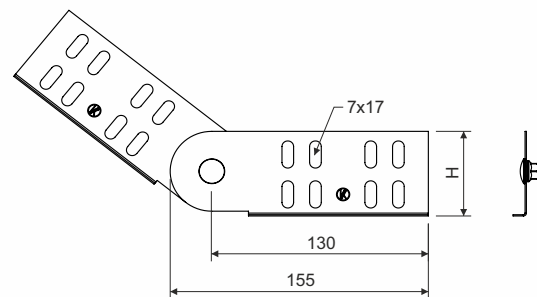

product description:

The hinged joint is used to create bends of any angle in cable trays running through JUPITER cable trays or cable ladders.

The coupling is supplied by 1 piece; must be used 2 pieces for installation. The couplings to be used on the right or left side do not differ.

To fix the connection use the bolt NSM 6X10. To protect the cables, the bolt head is inside the cable tray.

Join and bolt with a GMT surface finish is used for a tray with an F (ZM) surface finish.

These items can also be ordered in a varnished version.

surface finish:

S - Pre-Galvanized according to ČSN EN 10346, ČSN EN 10143, zinc-layer 15-27 µm
 GMT - non electrolytic plating, aluminum-zinc-layer 5-15 µm (equivalent Hot Dip Galvanized)
 ZM - galvanized steel with admixture of magnesium and aluminum according to EN 10346, EN 10143, protective layer 18-31 µm

sales amount:

á 1 pc

meets the requirements:

ČSN EN 61537:02

classification 🔥:

ČSN 73 0895 P 90-R
 DIN 4102-12 E 90
 STN 92 0205 PS 90

Fire classification is depend on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire

🔥 products approved for standard constructions

🔥 products approved for non-standard constructions

storage:

ČSN EN 60721-3-1

