


item number	A mm	B mm	for height of cable tray mm	thickness of metal sheet mm	weight kg/ps	amount of bolts for connection kg/pcs
<b>UP 35X42_S</b> <b>UP 35X42_ZM</b>	36	28	35	1,2	0,10	4
<b>UP 60X85_S</b> <b>UP 60X85_ZM</b>	36	53	60, 85	1,2	0,15	6
<b>UP 110_S</b> <b>UP 110_ZM</b>	36	78	110	1,2	0,18	8

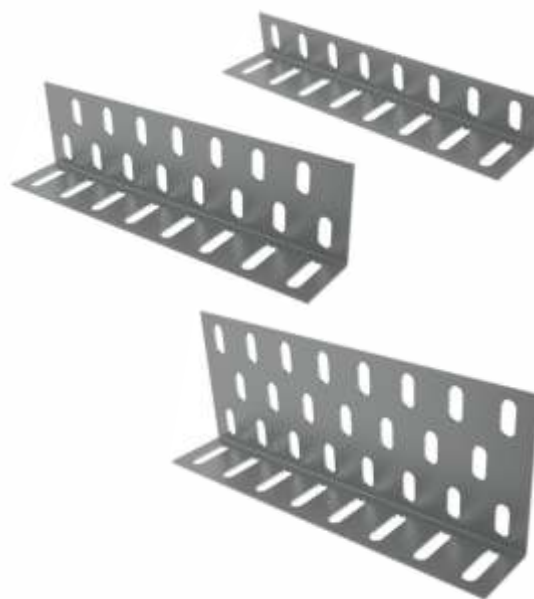

product description:

The supporting corner is used to connect the cable tray more firmly without a built-in coupling.

The connection is made by bolt NSM 6X10. To protect the cables, the bolt head is inside the cable tray.

ZM surface finish coupling shall be used for ZM or F surface finish trays.

GMT surface finish bolts shall be used for ZM or F surface finish trays.

These items can also be ordered in a varnished version.

surface finish:

S - Pre-Galvanized steel according to ČSN EN 10346, ČSN EN 10143, zinc-layer 15-27 µm

ZM - Pre-Galvanized steel with admixture of magnesium and aluminum according to ČSN EN 10346, ČSN EN 10143, protective layer 18-31 µm (replacement of hot dip galvanizing)

sales amount:

á 1 pc

meets the requirements:

ČSN EN 61537:02

storage:

ČSN EN 60721-3-1

