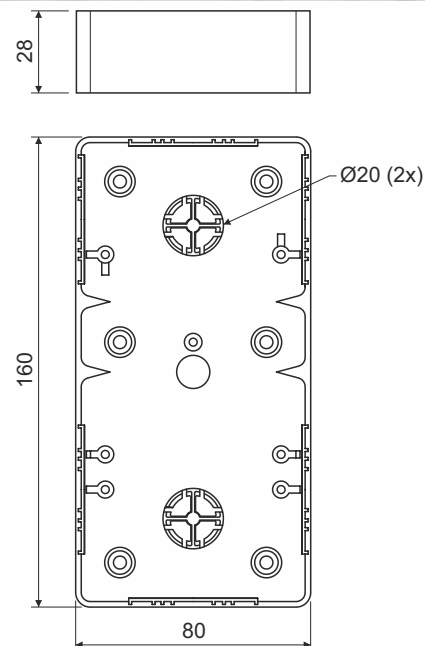



product description:

designed for distribution system with voltage 400 V and with maximum current 16 A
intended for devices of Classic and Swing - ABB series
allows installation of devices with greater mounting depth
installation of two devices or and double-socket
on the sides of the box are marked inlets for the trunkings
to install on materials with fire classes E or F, use insulating pad

material: **PVC**

color: **white**

self-snuffing: **yes, within 30 s**

temperature resistance: **-5 - +60 °C**

flaming loop test: **850 °C**

fire class for underlying material: **A1-D**

weight: **86 g**

meets the requirements: **ČSN EN 60670-1, ČSN EN IEC 60670-1 ed. 2:21**

storage: **ČSN 64 0090**

LK 80X28 2R_HB - 10 pcs boxes including device screws (for 2 devices in 1 box) packed in foil; 60 pcs boxes in cardboard

accessories:

cover **VLK 80/R; VLK 80/2R**

thermo-insulating pad **PI 80 2ZK**

terminal plate **S-66**

screwless terminal plates **TYP015, TYP016, TYP017, TYP018**

