


type number	A (mm)	weight (kg/pc)
NPKV 50_S	47,5	0,04
NPKV 50_F		0,04
NPKV 50_ZM		0,05
NPKV 75_S	72,5	0,05
NPKV 75_F		0,06
NPKV 75_ZM		0,06
NPKV 100_S	97,5	0,07
NPKV 100_F		0,08
NPKV 100_ZM		0,09
NPKV 125_S	122,5	0,08
NPKV 125_F		0,10
NPKV 125_ZM		0,10
NPKV 150_S	147,5	0,10
NPKV 150_F		0,11
NPKV 150_ZM		0,13
NPKV 200_S	197,5	0,13
NPKV 200_F		0,15
NPKV 200_ZM		0,16
NPKV 250_S	247,5	0,16
NPKV 250_F		0,19
NPKV 250_ZM		0,20
NPKV 300_S	297,5	0,19
NPKV 300_F		0,22
NPKV 300_ZM		0,24
NPKV 400_S	397,5	0,25
NPKV 400_F		0,29
NPKV 400_ZM		0,31
NPKV 500_S	497,5	0,32
NPKV 500_F		0,37
NPKV 500_ZM		0,40
NPKV 600_S	597,5	0,38
NPKV 600_F		0,44
NPKV 600_ZM		0,48

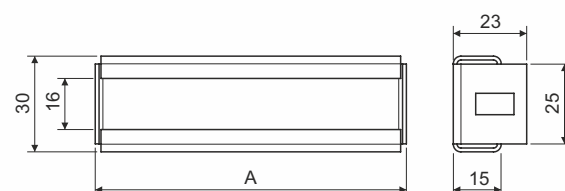

product description: Supporting profile is used for mounting of cable clamps and thereby for the anchoring of the cables inside the tray.

It finds its use primarily in vertical routes, for the lightening of the cable tension.


It is installed on the bottom of the cable tray and it is fixed by using two bolts NSM 6X10 to the tray sidewalls. To protect the cables, the bolt head is inside the cable tray. A bolt with a GMT surface finish is used for a tray with an F and ZM surface finish.

When using a cover it is necessary to take into account the height of the clamps.

surface finish: S - Pre-Galvanized according to EN 10346, EN 10143, zinc-layer 15-27 µm
 F - Hot Dip Galvanized according to ČSN EN ISO 1461, zinc-layer 45 µm (min. 35 µm)
 ZM - galvanized steel with admixture of magnesium and aluminum according to EN 10346, EN 10143, protective layer 18-31 µm

sales amount: 1 pc

storage: ČSN EN 60721-3-1

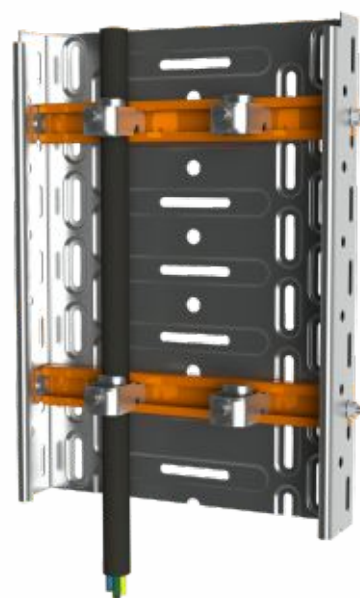

**WARNING****Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



NPKV