


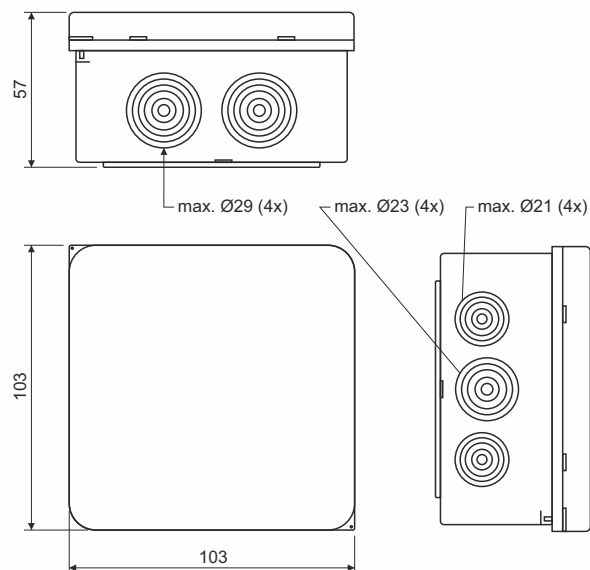

**product
description:**

designed for distribution system with voltage 400 V and with maximum current 16 A
intended for installation in environments that require IP 65 protection
equipped with an eye for sealing
to install on materials with fire classes A2-F, use thermally insulating pad
12 inlets: 4x max. Ø29 mm; 4x max. Ø23 mm; 4x max. Ø21 mm

material: halogen-free

color: light gray RAL 7035

temperature resistance: -25 - +60 °C

flaming loop test: 750 °C

fire class for underlying material: A1

protection types: IP 65

weight: 132 g

meets the requirements: EN 60 670-1

storage: ČSN 64 0090

005.CS.K_KB - 30 pcs of boxes with cover in carton

accessories:

screwless terminal plates TYP015, TYP016, TYP017, TYP018

recycling symbols:



 WARNING

risks associated
with

using the products: incorrect electrical installation can cause a fire - we recommend the connection to be carried out exclusively by an authorized person

follow the manufacturer's installation instructions according to the installation instructions and videos

damage to the product - if the box is visibly damaged, stop using it

under normal and foreseeable conditions of use, the installed box does not pose any risks to consumers