


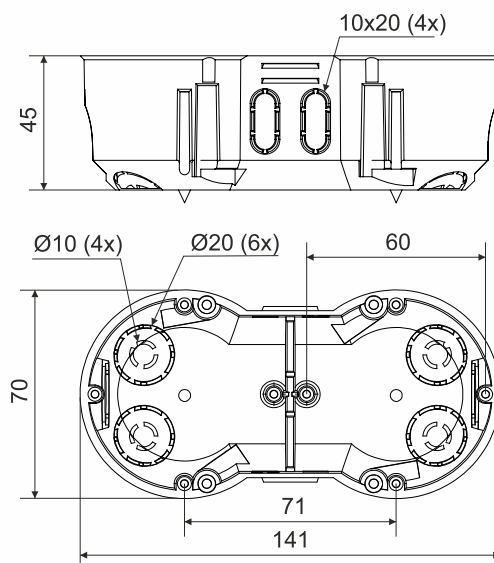

product description: designed for distribution system with voltage 400 V and with maximum current 16 A
for modern installations in combined frames (spacing 71 mm)
significant rigidity makes device installation easier

material: PVC

color: gray

self-snuffing: yes, within 30 s

temperature resistance: -5 - +60 °C

flaming loop test: 850 °C

fire class for underlying material: A1-D

weight: 71 g

meets the requirements: ČSN EN 60670-1, ČSN EN IEC 60670-1 ed. 2:21

storage: ČSN 64 0090

KP 64/2_KA - two boxes packed in shrink foil and covered with label, device screws included in the bag, 50 pcs of boxes placed in carton

accessories: cover VKP 64/2L
extending frames NR 5X5; NR 68/6, NR 68/10
screwless terminal plates TYP015, TYP016, TYP017, TYP018

auxiliary tools: non-hammered masonry cutter FR 68 SDS

recycling symbols:



box



foil



cardboard



screws

WARNING

risks associated with

using the products: incorrect electrical installation can cause a fire - we recommend the connection to be carried out exclusively by an authorized person
follow the manufacturer's installation instructions according to the installation instructions and videos
damage to the product - if the box is visibly damaged, stop using it
under normal and foreseeable conditions of use, the installed box does not pose any risks to consumers