
KOPOS www.kopos.com

type number: **KSPE_PO**

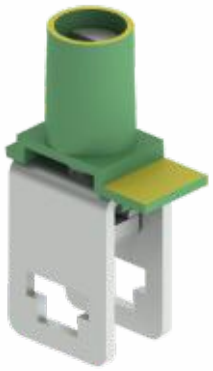

product description: The KSK and KPK fire-resistant boxes can be fitted with an earthing terminal. Designed for grounding conductors with a cross-section of up to 25 mm²

surface finish: steel with green-yellow cover

sales amount: á 1 pc

classification: 

| | |
|---|---|
| ČSN 73 0895 | P 90-R |
| DIN 4102-12 | E 90 |
| STN 92 0205 | PS 90 |

storage: ČSN EN 60721-3-1

## ⚠ WARNING

**Electric Shock Hazard**

Improper or unqualified connection of conductors, or damaged insulation, may lead to electric shock.

**Safe Use**

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:

KSPE

3-18/11/2026 KOPOS KOLÍN a.s., Havlíčkova 432, 280 02, Kolín IV, Česká republika